



CAREFREE

AWNING STABILIZER POLE KIT - HD

A SUPPORT AND TIE DOWN KIT FOR VERTICAL ARM AND BOX AWNINGS DURING PROLONGED USE.

RV Accessories



NOTICE After opening the awning set the awning power switch to off to prevent the awning from retracting when the supports are installed. Retracting the awning with the supports and tie-downs attached can damage the awning.

NOTICE If it is necessary to adjust the awning pitch after staking, loosen the tension straps and lower the height of the vertical support before adjusting the pitch. Failure to do so can cause damage to the awning.

CAREFREE'S LATITUDE AND VERTICAL ARM AWNINGS

1. Open the awning and set the desired pitch according to the product documentation.

2. Press the cradle over the pin on the pole. No tools required. It is not necessary to remove the cradle for storage.

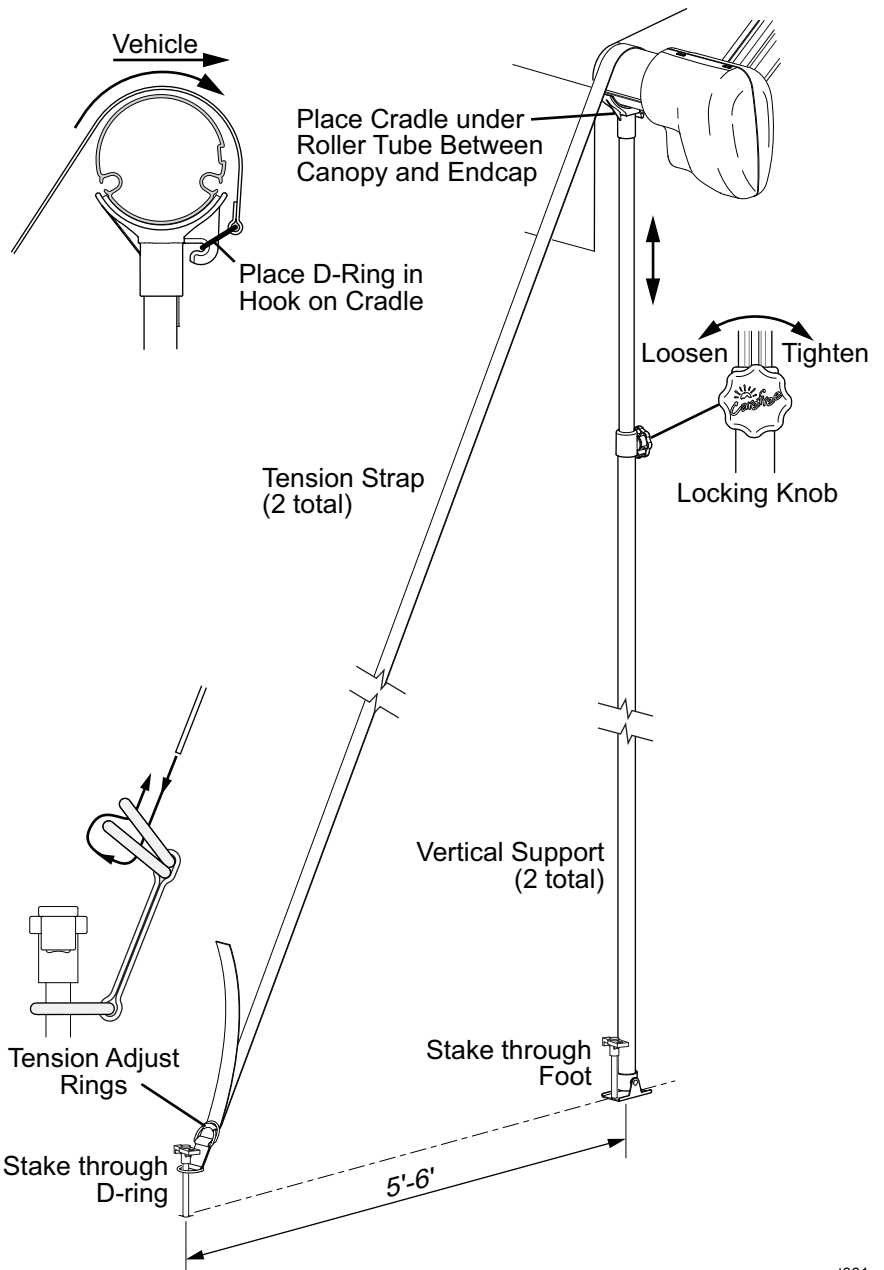

3. Place the support pole cradle under the roller tube between the canopy and endcap.

4. Loosen the locking knob on the vertical support. Adjust the height of the support then tighten the knob.

NOTICE Do not use the supports to adjust the awning's pitch. Use the awning's pitch adjustments prior to installing the supports.

The poles may be adjusted from 56" to 108".

5. Place a stake through the D-ring of the tension strap. Then drive the stake into the ground approximately 5'-6' in front of the awning.

6. Loop the strap over the roller tube. Attach the D-ring to the hook on the cradle.

7. Tighten the strap by pulling the open end of the strap through the tension adjustment rings.

8. Repeat for the other side.


NOTICE Always remove the supports before retracting the awning. Retracting the awning with the supports and tie-downs attached can damage the awning.

BOX AWNINGS

Always observe the notices on the 1st page.

1. Press the lead rail grip over the pin on the pole.
No tools required. It is not necessary to remove the grip for storage

Lead Rail Grip



ast004


2. Open the awning and set the desired pitch according to the product documentation.
3. Loosen the lead rail grip knob.
4. Squeeze the finger tabs to open the grip jaws.
5. Place jaws over back edge of lead rail and release the tabs.
6. Rotate the pole until it is vertical to the ground and tighten the knob.
7. Loosen the locking knob on the vertical support. Adjust the height of the support then tighten the knob.

NOTICE

Do not use the supports to adjust the awning's pitch. Use the awning's pitch adjustments prior to installing the supports.

The poles may be adjusted from 56" to 108".

9. Place a stake through the D-ring of the tension strap. Then drive the stake into the ground approximately 5'-6' in front of the awning.
8. Place the D-ring on the other end of the strap in the hook of the grip.
9. Tighten the strap by pulling the open end of the strap through the tension adjustment rings.

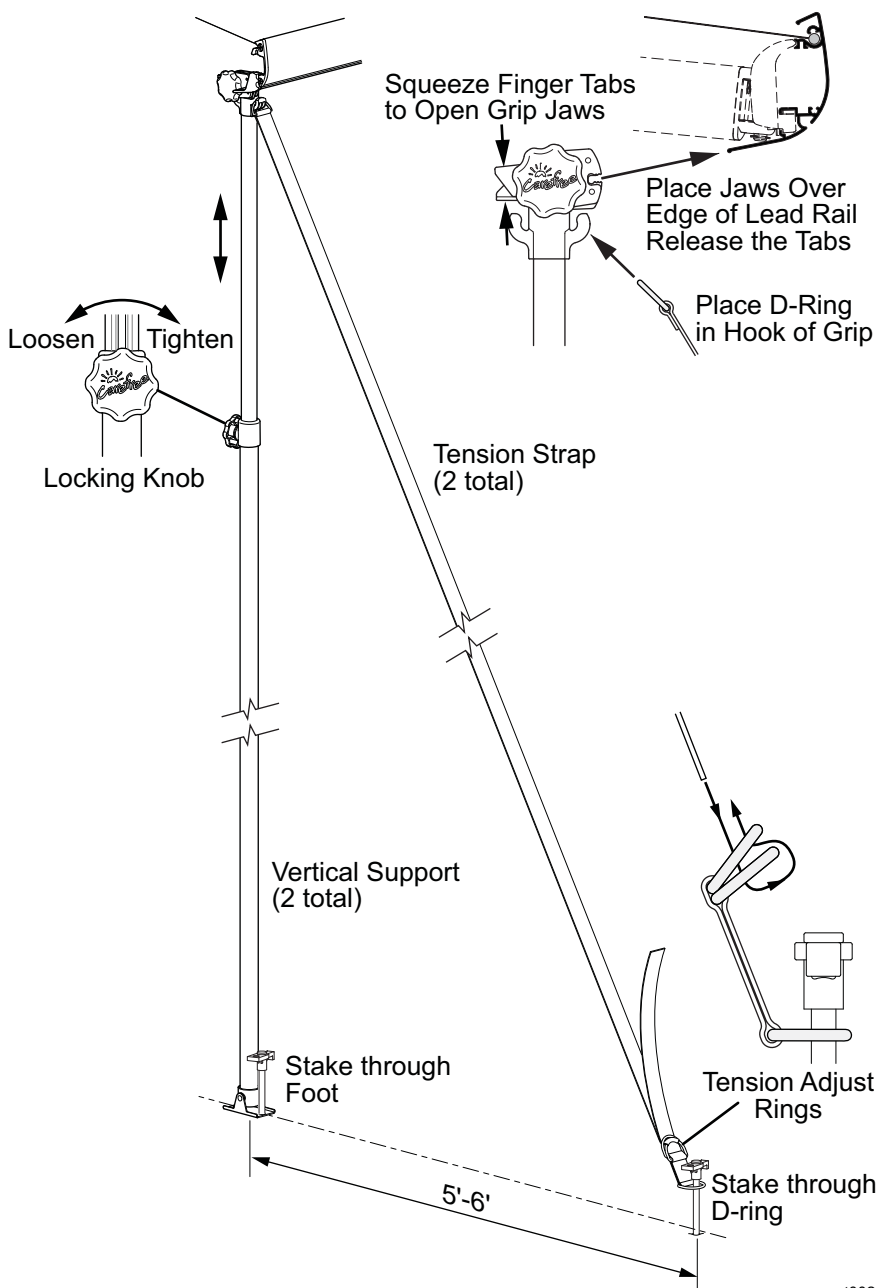

ast002

NOTICE

Always remove the supports before retracting the awning. Retracting the awning with the supports and tie-downs attached can damage the awning.