

kojack[®]

4000KG

Hydraulic Caravan and RV Jack

Part Number: KJ4T



User Manual



Meets Australian and New Zealand
Standard AS/NZS 2693:2007

 **purpleline[®]**
design...innovate...improve


Patent Number: 201310641
Design Registration: 347123



"KOJACK" 4000KG HYDRAULIC CARAVAN AND RV JACK

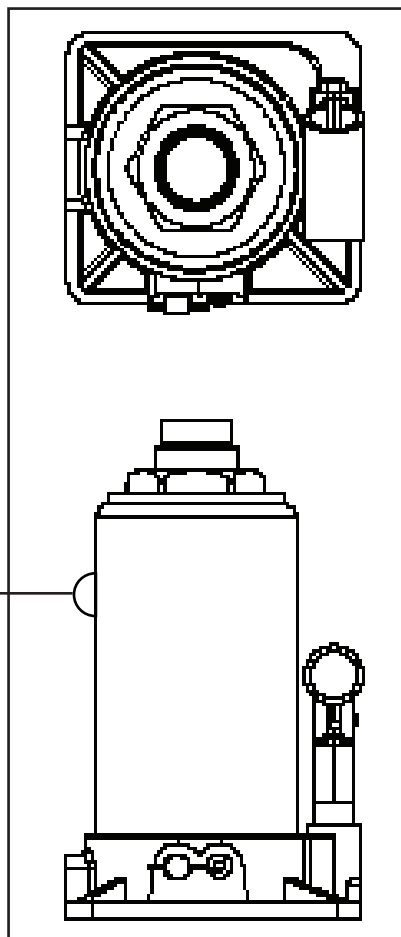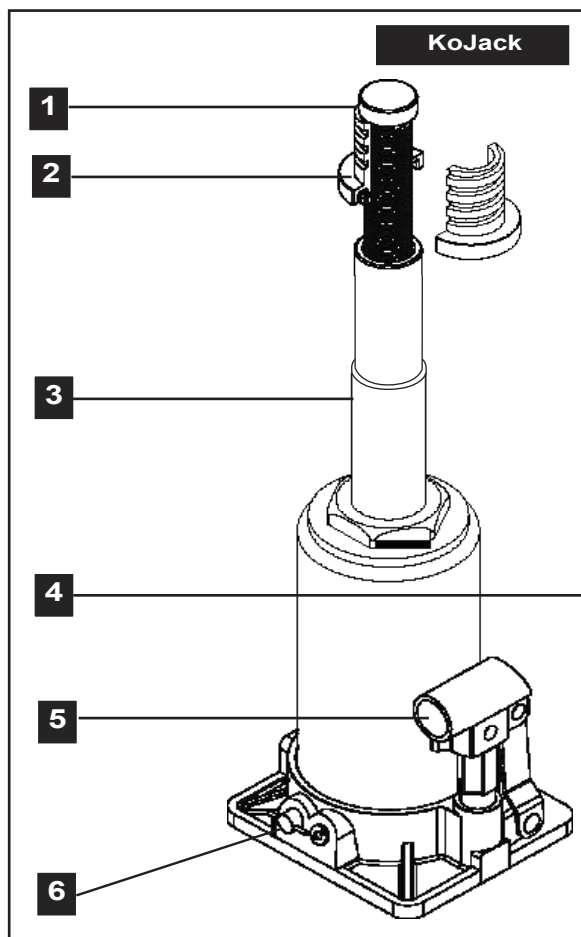


No	Items
1	Cap & Threaded Rod
2	Collar
3	Hydraulic Ram - 2 Stage
4	Oil Filler Cap
5	Tube for Lifting Handle
6	Release Valve
7	Ball Adapter
8	Square Head Adapter
9	Extension - 100mm

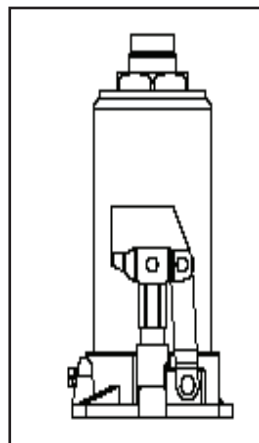


KOJACK COMPONENTS


BALL HEAD

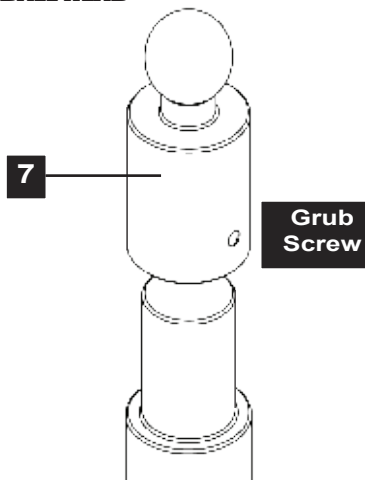

SQUARE HEAD

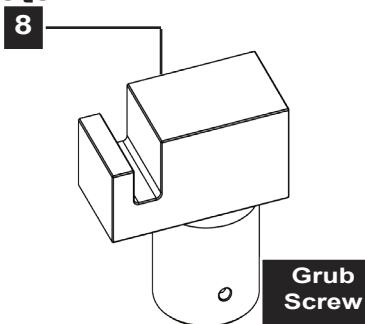


150mm EXTENSION PIECE (NOT INCLUDED AS STANDARD)

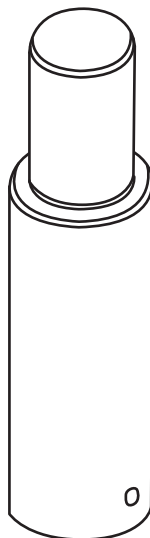

(OPTIONAL) THIS PART CAN BE PURCHASED SEPERATELY IF REQUIRED FOR EXTRA LIFT HEIGHT. IDEAL FOR USE WITH LARGE OFF-ROAD CARAVANS FOR MORE INFORMATION OR TO ORDER THIS PART CONTACT PURPLE LINE ON +61 3 9588 2959

100mm EXTENSION PIECE

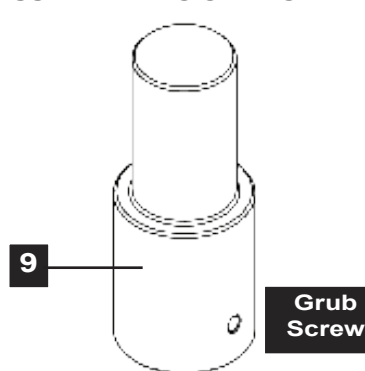

WARNING
READ USER MANUAL CAREFULLY
FOR SAFE OPERATION INSTRUCTONS

SPECIFICATIONS

KJ4T KOJACK 4000KG HYDRAULIC CARAVAN AND RV JACK

• Working Load Limit:	4000 KG
• Minimum Height of KoJack:	171mm
• Maximum Lift Height of KoJack:	453mm
• Minimum Height with Head Attachment:	265mm
• Maximum Lift Height with Head Attachment:	485mm
• Minimum Height with Head Attachment 100mm Extension	365mm
• Maximum Lift Height with Head Attachment 100mm Extension:	585mm
• Minimum Height with Head Attachment 150mm Extension	415mm
• Maximum Lift Height with Head Attachment 150mm Extension:	635mm
• Minimum Height with Head Attachment, 150+100mm Extension:	515mm
• Maximum Lift Height with Head Attachment, 150+100mm Extension:	735mm
• Lift Range:	220mm

Kojack is engineered to lift most on-road and off-road Caravans and Trailers fitted with a ball socket mounting at the lifting point, including but not limited to Jayco Caravans or square head mounting at the lifting point, including but not limited to vehicles built with a Trailer Mate jacking mount. It does not require the removal of the jockey wheel or interfere with its operation and is a safe high lift range jacking system. **Kojack** minus the components can also be used to lift most vehicles up to 4 tonnes in weight.

GENERAL SAFETY

WARNING: Read this User Manual carefully before use, to familiarise yourself with the operation of the **Kojack** and to ensure you are able to operate it in a safe manner. Failure to heed the following instructions could result in serious injury or damage to property.

- Use only the components supplied.
- Keep and maintain the **Kojack** and components in good condition.
- Inspect and test the **Kojack** and components before use, to ensure there are no leaks, loose, bent or missing parts.
- Do not use the **Kojack** and its components if they are in any way defective.

RECOMMENDED SAFE OPERATING INSTRUCTIONS

- Do not operate the **Kojack** and its components whilst under the influence of drugs, alcohol or any medication that could impair your ability to use the equipment safely.



RECOMMENDED OPERATING INSTRUCTIONS *cont.....*

- Consult the vehicle owner's manual prior to using the **Kojack** and its components.
- The vehicle must be attached to the tow vehicle before and when jacking.
- Keep the work area clean and free of hazards.
- Keep children at a safe distance whilst working on the vehicle.
- **Kojack** should be used on firm, level ground, wherever possible.
- Do not occupy the vehicle whilst lifting or working on it.
- Chock all wheels before using the **Kojack** to lift the vehicle.
- No person should place any portion of their body under the vehicle supported only by the **Kojack**.
- After the vehicle is raised to the correct height, secure it by placing a vehicle support stand under the chassis.

IMPORTANT NOTICE

During shipment and handling, air can become trapped in the hydraulic system degrading the performance of the **Kojack**. This can also occur when changing and topping up hydraulic fluid. To purge air from the system, lower the Hydraulic Ram as far as it will go, place the jack horizontally with the Oil Filler Cap facing upwards and remove the cap, which will allow the air to escape.

OPERATING INSTRUCTIONS

TO LIFT

1. Unscrew the Cap by turning it anti-clockwise on a minimal distance until it will accommodate the Collar (aprox. 5cm above the Hydraulic Ram).
2. Fit the two sides of the Collar around the threaded section under the Cap.
3. Screw the Cap down to restrict vertical movement of the Collar between the Cap and the Hydraulic Ram before fitting any Adaptor or Extension.
4. Fit the Ball or Square Head Adapter over the Collar, depending upon application.
5. Insert the Hex Key into the Grub Screw located on the Adapter and tighten by turning it clockwise until firm. Repeat for the other Grub Screw.
6. Position the **Kojack** under the ball socket or square mount on the vehicle.
7. Join the three sections of the Jack Handle together.
8. Insert the notched end of the Jack Handle into the **Kojack** Release Valve and rotate clockwise to close the valve.
9. Place the other end of the Jack Handle in the Tube mounted on the **Kojack** and move the Jack Handle up and down to raise the vehicle.
10. If the jack is unable to lift the vehicle to the desired height, insert the Jack Handle into the Release Valve and gently turn anti-clockwise to lower the vehicle.
(Once the Release Valve is sufficiently turned it will release the Jack to descend)



OPERATING INSTRUCTIONS *cont.....*

- the descent can be controlled by the amount the Release Valve is turned).
- 11. Insert the Hex Key into one Grub Screw at a time and turn it anti-clockwise sufficiently to release the Ball or Square Head Adapter.
- 12. Fit either the 150mm, 100mm or both Extension Pieces over the Collar and tighten the Grub Screws to secure it.
- 13. Fit the appropriate Head Adapter over the Extension Piece and tighten the Grub Screws to secure it.
- 14. Repeat steps 8 and 9.
- 15. Place a vehicle support stand at an appropriate spot under the chassis of the vehicle suitable for resting and securing the vehicle and then lower the vehicle by gently turning the Release Valve on the **Kojack** anti-clockwise until the vehicle is rested on the vehicle support stand.
- 16. Remove the **Kojack**

TO LOWER:

- 17. Position the **Kojack** as per the set up used to raise the vehicle, under the ball socket or square mount on the vehicle.
- 18. Repeat Steps 8 and 9.
- 19. Remove the vehicle support stand.
- 20. Insert the Jack Handle into the Release Valve of the **Kojack** and gently turn anti-clockwise to lower the vehicle.
- 21. Remove the **Kojack**

AFTER USE AND STORAGE:

- Remove the Ball or Square Head Adapter, Extension/s and Collar.
- Ensure the Cap and threaded section is secured in the Hydraulic Ram by turning it clockwise until it will turn no more.
- Ensure the Hydraulic Ram is secure in the **Kojack** by pushing it down as far as it will go. (If you have not already opened the Release Valve you will need to do this to lower the Hydraulic Ram)
- Store the **Kojack** and its Components upright in a dry environment to prevent the components from rusting.
- Store the **Kojack** and its components in a safe place inaccessible to children.



MAINTENANCE

IMPORTANT NOTICE:

When replacing or topping up hydraulic fluid use a high grade hydraulic fluid ISO10-15 or equivalent. Do not use brake fluid, alcohol, glycerin, detergent, motor oil or any other fluid perceived or claimed suitable, as the use of fluids other than the hydraulic fluid recommended will cause serious damage to the internal components rendering the Jack in-operative.

TO ADD HYDRAULIC FLUID:

Open the Release Valve by turning it anti-clockwise and depress the Hydraulic Ram as far as it will go. Place the Jack on its side horizontally with the Oil Filler Cap facing upwards and remove the cap. Fill with the recommended hydraulic fluid until the fluid is level with the filler aperture. Prevent any contaminants from mixing with the hydraulic fluid and entering the Jack. Replace Oil Filler Cap.

TO CHANGE HYDRAULIC FLUID:

Hydraulic Fluid should be changed every twelve (12) months to maintain the Jack in peak performance. To replace the hydraulic fluid remove the Oil Filler Cap, place the jack on its side over a tray or bowl with the oil filler aperture facing downwards and allow the fluid to drain. This may take some time as air must enter to allow the fluid to drain. Dispose of the old hydraulic fluid according to any government regulations that apply. (Note hydraulic fluid is toxic to the environment). Once drained fill the jack with hydraulic fluid as per the instruction on how 'to add hydraulic fluid'

LUBRICATION:

It is prudent to lubricate all pivoting joints on the jack every three (3) months with a light oil.

PREVENTING RUST:

Check the Hydraulic Ram every three (3) months for signs of corrosion. If apparent clean with an oily rag until removed. To minimise corrosion ensure the Hydraulic Ram is inserted all the way in the Jack when not in use.

GENERAL CARE AND MAINTENANCE:

Do not totally unscrew or remove the Release Valve.

DISCLAIMER

When the **Kojack** and its Components are maintained and used correctly they are an effective and simple means to raise a vehicle. However, Purple Line will not warrant or accept any liability for improper fitment, use or misuse, lack of maintenance and unauthorised modification or repair of the **Kojack** and its

DISCLAIMER *cont.....*

Components and any consequential loss that may result.

Photographs and images are for illustration purposes only and may differ from the actual products. Purple Line reserves the right to alter product specifications and operating instructions without prior notice.

INSTRUCTIONS

The **Kojack** and Components (Goods) are guaranteed for 12 months from date of purchase and subject to Australian Consumer Law.

Purple Line: Warrants the **Kojack** and Components are supplied free of defects.

Refund: The Goods will be refunded if not fit for purpose.

Replaced: The Goods will be replaced if defects were apparent upon purchase or a major failure occurs, which cannot be repaired.

Repair: The Goods will be repaired in the event of failure.
Goods presented for repair may be repaired or replaced with refurbished goods or parts of a similar type.

Contacts: To make a warranty claim first contact the retailer the Goods were purchased from and if purchased online Purple Line
<http://www.purpleline.com.au/contact/php>

To register your purchase go to www.purpleline.com.au/product-registration.php



Purple Line Pty. Ltd.
246A Governor Road
Braeside VIC Australia 3195



+61 3 9588 2959



enquires@purpleline.com.au



www.purpleline.com.au

Patent Number: 201310641

Design Registration: 347123